



Mid Norfolk Canopies & Trailers Ltd

"THE TRAILER PEOPLE"

Sales | Repair | Servicing

Mid Norfolk Canopies & Trailers Ltd are agents for the Meredith and Eyre Trailer range.

Tilt Bed Trailers

2600kg, 3000kg & 3500kg GVW

Designed and manufactured in the UK, the Tilt Bed Trailer range comes loaded with a host of benefits, including:

3' Full Width Loading Ramp, with Gas Assistance, or a Pair of Individual Skids, (storage provided for 4)

Integral Lashing Points and Deck Rings, Spare Wheel mounted under the Floor, Locking 50mm Ball Coupling, Heavy duty Jockey Wheel.



TILT BED TRAILERS—STANDARD SPECIFICATION

	MTB2616T2	MTB3016T2	MTB3516T2
MAXIMUM GROSS WEIGHT kg	2600	3000	3500
UNLADEN WEIGHT kg with SKIDS (Pair)	795	800	870
OVERALL LENGTH / WIDTH	6405mm (21') / 2055mm (6' 9")		
PLATFORM LENGTH	5064mm (16' 6")		
WIDTH mm	1992mm (6' 6")		
HEIGHT OF SIDES mm	380mm (15")		
TYRE SIZE	195/50 R 13 C 4 Stud	195/50 R 13 C 4 Stud	195/50 R 13 C 5 Stud

The Tilt Bed Trailer Chassis is fitted with M+E manufactured heavy duty, low maintenance rubber torsion axles.

The suspension has been proven in the Construction Plant industry and it has excellent ride characteristics to cope with operation in both laden and unladen conditions.

The Tilt Bed Platform has an 18mm Plywood central floor flanked by steel runways, giving a truly flat deck with integral lashing points and deck rings, making these trailers suitable for the transportation of a wide range of on- and off-road cars and construction plant plus the day to day duties of a flat bed trailer.


Loading is via the full width 3' ramp, with gas assist, or by individual skids which are stowed securely and quietly underneath the platform. A total of 4 skids can be carried. The low platform height and reduced loading angle of only 12° makes for a versatile multi purpose trailer.

The loading platform is further enhanced by having the spare wheel with 195/50 R 13C tyre and the hydraulic cylinder safely mounted under the floor.

A Maintenance Safety Prop is provided for use when the platform is raised, for access to the under floor area.

The trailers are fitted with full EC approved lighting system, including LED side marker lights, reversing lights and 13 Pin Electric Plug, with a converter for 7 Pin.

Low mounted HD Winch with professional roller box for offset loading

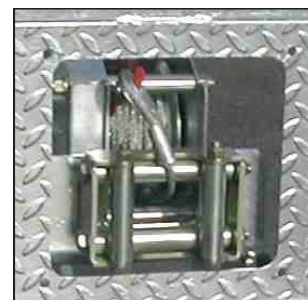


MTB3516T2 Trailer with Heavy Duty Winch, & Headboard & Sides Options



Full Width 3' Ramp with Gas Assist, with optional Headboard & Sides Kit



Trailer shown with Load Positioning Kit

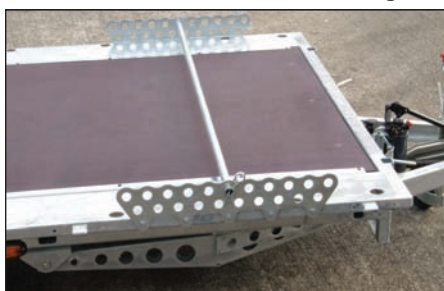

Trailer with Removable Skids Option



Mid Norfolk Canopies & Trailers Ltd

Dereham Road | Scarning | Dereham | Norfolk NR19 2PG

Tel: 01362 687297 / 687257 | Fax: 01362 687258 | Email: info@midnorfolktrailers.co.uk | Web: www.midnorfolktrailers.co.uk

Director: G. A. Long | Dimensions & weights are given as a guide only. We reserve the right to alter specifications without notice